

URBAN AVENUE



SPECIFICATIONS


COLLECTION NAME	: URBAN AVENUE SQ
YARN	: 100% PP
CONSTRUCTION	: Tufted Multi-Level Loop
DYE METHOD	: Solution Dyed
GAUGE	: 1/12"
STITCHES PER INCH	: 10
PILE HEIGHT	: 4 mm (+/- 0.5 mm)
TOTAL HEIGHT	: 7 mm (+/- 0.5 mm)
PILE WEIGHT	: 20 oz/sy (680 gm/sm)
TOTAL WEIGHT	: 178 oz/sy (4000 gm/sm +/- 200 gm/sm)
PRIMARY BACKING	: Non-woven
SECONDARY BACKING	: Green Backing - PVC Free
SIZE	: 25 x 100 cm/tile
PACKING	: 20 pcs (5 sm)/box

* As with all dyed products, colours are subject to dye lot variations.


PERFORMANCE SPECIFICATIONS

COLOURFASTNESS	: Grade ≥ 4 (AATCC Test Method)
	: Result: 6 = OK
FLAMMABILITY	: Passed (ASTM E648, GB 8624-2006)
SMOKE DENSITY	: Passed (ASTM E662, GB/T 8627-1999)
STATIC PROPENSITY	: ≤ 3.0 kV (AATCC-134, GB/T 18044-2000)


RECOMMENDED INSTALLATION METHODS :



Herringbone



Ashlar




Brick



UV05 GREY



UV12 BLACK

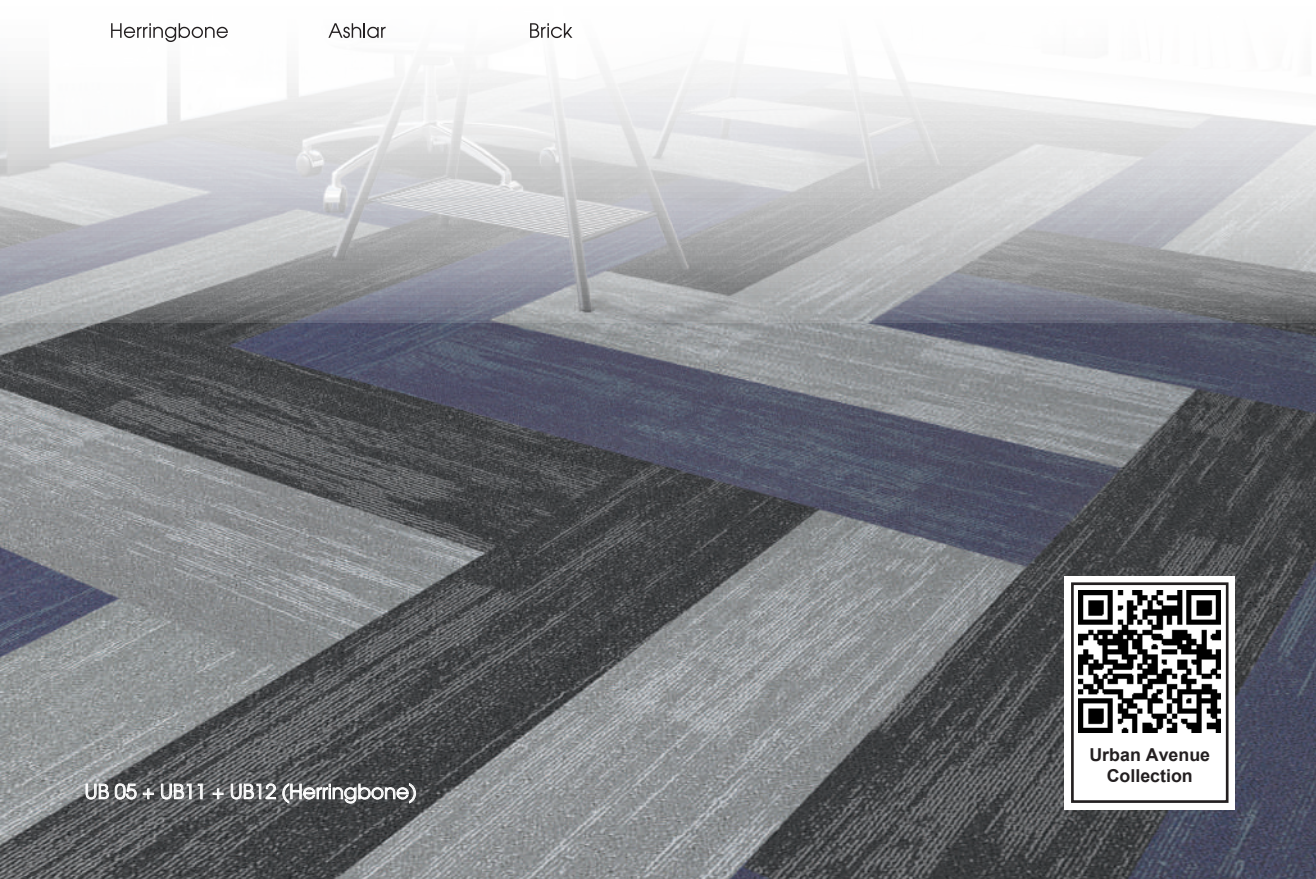

UB 05 + UB11 + UB12 (Herringbone)



Urban Avenue
Collection

URBAN BRIDGE

SPECIFICATIONS



COLLECTION NAME	: URBAN BRIDGE SQ
YARN	: 100% PP
CONSTRUCTION	: Tufted Level Loop
DYE METHOD	: Solution Dyed
GAUGE	: 1/12"
STITCHES PER INCH	: 10
PILE HEIGHT	: 4 mm (+/- 0.5 mm)
TOTAL HEIGHT	: 6.5 mm (+/- 0.5 mm)
PILE WEIGHT	: 20 oz/sy (680 gm/sm)
TOTAL WEIGHT	: 142 oz/sy (4800 gm/sm +/- 200 gm/sm)
PRIMARY BACKING	: Non-woven
SECONDARY BACKING	: PVC with fiberglass
SIZE	: 50 x 50 cm/tile
PACKING	: 20 pcs (5 sm)/box

* As with all dyed products, colours are subject to dye lot variations.


PERFORMANCE SPECIFICATIONS

COLOURFASTNESS	: Grade ≥ 4 (AATCC Test Method)
	: Result: 6 = OK
FLAMMABILITY	: Passed (ASTM E648, GB 8624-2006)
SMOKE DENSITY	: Passed (ASTM E662, GB/T 8627-1999)
STATIC PROPENSITY	: ≤ 3.0 kV (AATCC-134, GB/T 18044-2000)

RECOMMENDED INSTALLATION METHODS :

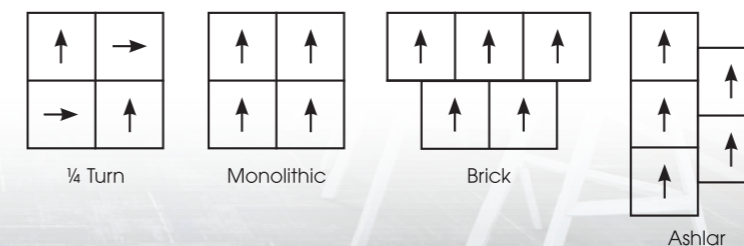

UB01 DARK GREY



UB02 GREY



UB03 BEIGE



UB04 EARTH

UB02 (Quarter Turn)



Urban Bridge Collection